


FEATURES:

- Reduce compressed air temperatures to within 5° F to 20°F of ambient temperature
 - Makes air safe, usable, and capable of further filtering and drying
 - Eliminates up to 70% of water
- Aftercooler, separator, and automatic condensate drain piped and skid mounted
- Choice of:
 - Electrically driven fans
 - Includes automatic interconnect for 3 phase units- determines if incoming power is 230/3 or 460/3 and automatically selects motor leads to match supply voltage
 - Air driven fans
 - Includes air motor, regulator, lubricator, and relief valve
- Maximum working pressures to 400 psig available

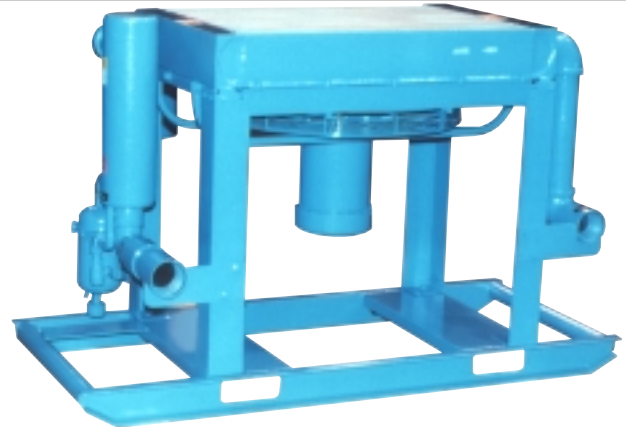

**RENTAL AIR-COOLED
AFTERCOOLERS/
SEPARATORS**

CAPACITY SELECTION CHART Max. scfm @ 5, 10, 15 and 20°F approach temperature to ambient


INLET TEMP. °F.	150				200				250			
	5	10	15	20	5	10	15	20	5	10	15	20
AACE-1600 & AACA-1600	790	1440	1950	2260	710	1290	1720	1950	660	1200	1600	1860
AACE-2500 & AACA-2500	1220	2220	3000	3470	1090	1980	2680	3100	1035	1880	2500	2870
AACA-3000	1450	2650	3580	4120	1295	2360	3200	3710	1243	2260	3000	3450

Above capacities are based on 80 to 125 PSIG operating pressures. Maximum pressure drop, less than 3 psi.

SPECIFICATIONS

ELECTRICALLY DRIVEN											
Model	Motor TEFC	Voltage H.P.	Phase	Full Load Amps 110/230V	Full Load Amps 460V	IN / OUT CONNECTION	DIMENSIONS (in)			Shipping Weight (lb)	
							H	W	L		
AACE-450	1/2	110/1/60	1	9	-	2" NPT	66	36	60	400	
AACE-1000	2	110/1/60	1	18	-	3" NPT	66	48	72	500	
AACE-1600	1.5	110/1/60	1	18	-	3" NPT	66	48	72	650	
AACE-2500	7.5	230 or 460/3/60	1	22/11	-	4" NPT	62	48	80	900	
AACE-3000	10	230 or 460/3/60	1	28/14	-	4" NPT	62	60	80	1000	

AIR DRIVEN						
Model	Air Motor Usage	IN / OUT CONNECTION	DIMENSIONS (in.)			Shipping Weight (lb)
			H	W	L	
AACA-450	10 cfm	2" NPT	46	48	60	400
AACA-1000	20 cfm	2" NPT	46	48	60	600
AACA-1600	70 cfm	3" NPT	73	48	72	800
AACA-2500	80 cfm	4" NPT	66	48	90	1000
AACA-3000	120 cfm	4" NPT	73	60	108	1200
AACA-3500	120 cfm	4" NPT	73	60	108	1400

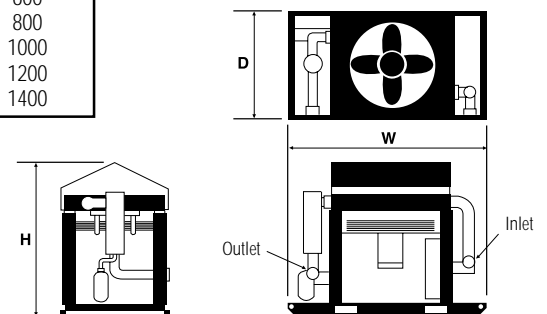

RENTAL DIVISION
 510 N. Wildwood Drive. Irving TX 75061
 Tel: 972-579-2963 Fax: 972-554-6510
 E-mail: rental@hankisonintl.com Internet: www.hankisonintl.com